



NEWGEN GUIDE AND CURTAIN LOK SYSTEM STEEL JAMB MOUNTING

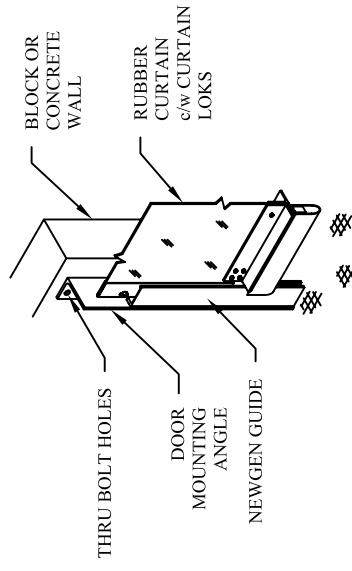

NEWGEN GUIDE AND CURTAIN LOK SYSTEM CONCRETE WALL MOUNTING **

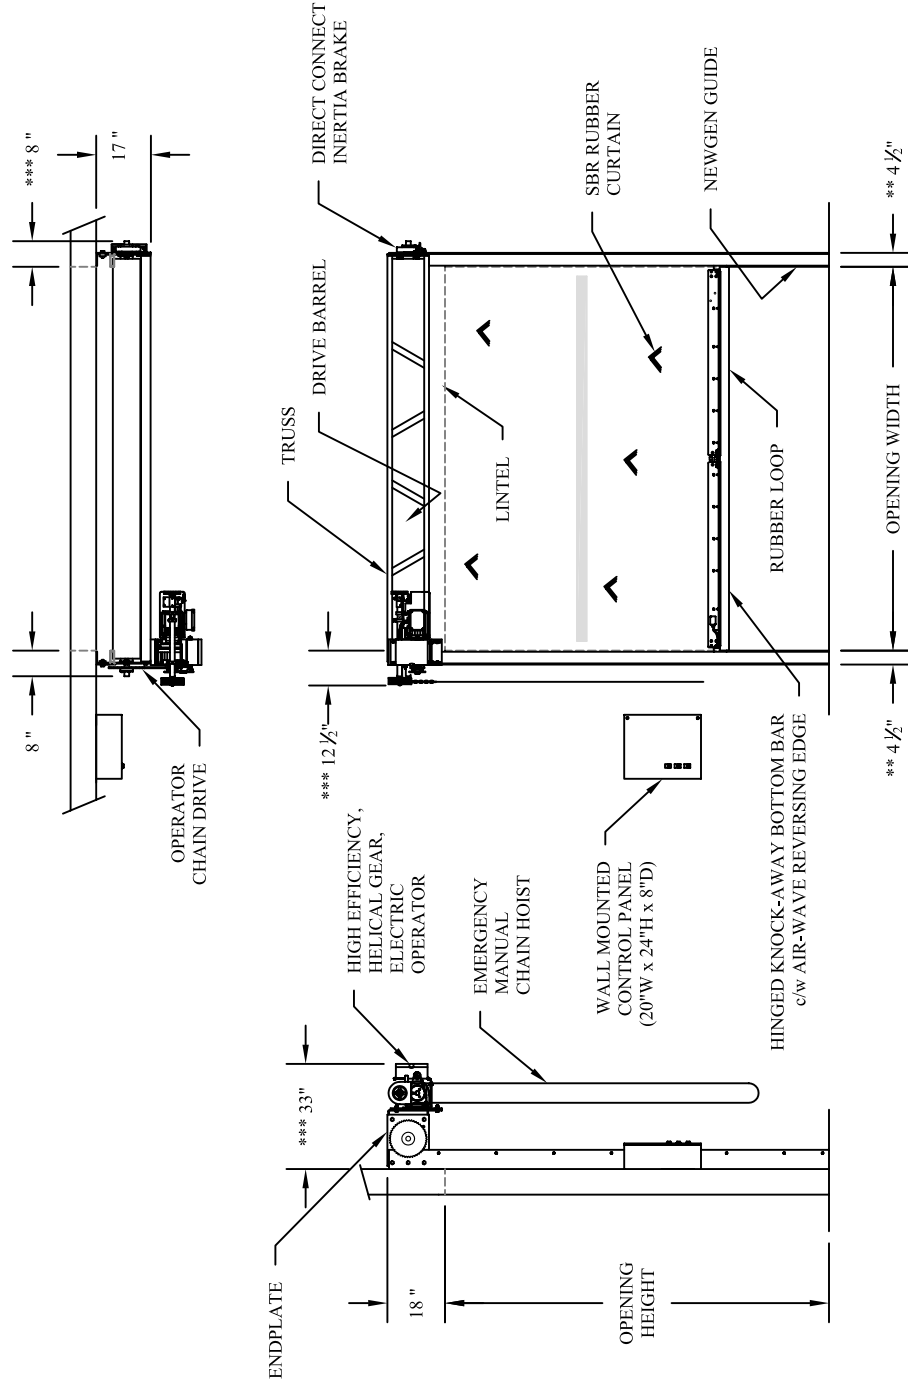

*** CLEARANCE DIMENSION IS 8" FOR CONCRETE MOUNT CONFIGURATION
 *** OPTIONAL HOODS REQUIRE 10" & 16" SIDEROOM, 21" HEADROOM AND 37" OPERATOR PROTRUSION
 ***** FOR OPTIONAL JAMB MOUNTED WINDBAR ADD 6" TO OPENING HEIGHT

TNR INDUSTRIAL DOORS INC.		SHOP DRAWING, MODEL HDP, LEFT HAND	
EXT. DETAIL: DOOR MOUNT OPERATOR & INERTIA BRAKE		STANDARD SYSTEM INCLUDES	
LIMITATIONS: MAX. OPENING WIDTH 25", MAX. OPENING HEIGHT 10'		- SPEEDS UP TO 30 IPS OPEN, 12 IPS CLOSE	
DATE DRN: SEPT. 29, 2008		- TIMER TO CLOSE (USER SELECT)	
DRAWN BY: RUSS BOWMAN		- NEMA 4 CONTROL PANEL & LIMIT BOX	
ELECTRICAL CRITERIA: PLC & FREQUENCY INVERTER DRIVE		- DIRECT CONNECT INERTIA BRAKE	
CONTROL PANEL NEMA/EEMAC 4 STD. OR _____		- REVERSING EDGE	
PRIMARY POWER SUPPLY: _____ Volts, 1 Phase, 60 Hertz		- THRU-BEAM PHOTOEYE	
OPERATOR CRITERIA: HG, HIGH EFFICIENCY HELICAL GEAR		- 3" HIGH, BLACK EPDM RUBBER LOOP	
LIMIT BOX NEMA/EEMAC 4 STD. OR _____		- HINGED KNOCK-AWAY STYLE BOTTOM BAR	
_____ HP, DOOR SPEED: OPEN @ _____ ips, CLOSE @ _____ ips		- NEWGEN GUIDE AND CURTAIN LOK SYSTEM	
END USER: _____		- 90 MPH WINDLOAD RATING	
DEALER: _____		- PROGRAMMABLE CONTROLLER	
DOOR SIZE: _____		- FREQUENCY INVERTER	
SERIAL No.: TNR- _____			